


MOBILE HEAVY DUTY PALLET TRUCK

MODEL: ML70

The beefed up version of the ML55, the ML70 Pallet Truck is designed to handle extra heavy applications.

Durable, versatile and easy to use and maintain, the ML70 features an ergonomic design that reduces operator fatigue and downtime. It features a re-buildable state-of-the-art hydraulic pump and comes in a variety of standard sizes or can be custom built to suit unique applications.

This truck provides exceptional maneuverability in compact areas and features a reinforced design and steel wheels and rollers to handle the rigors of extreme load handling.

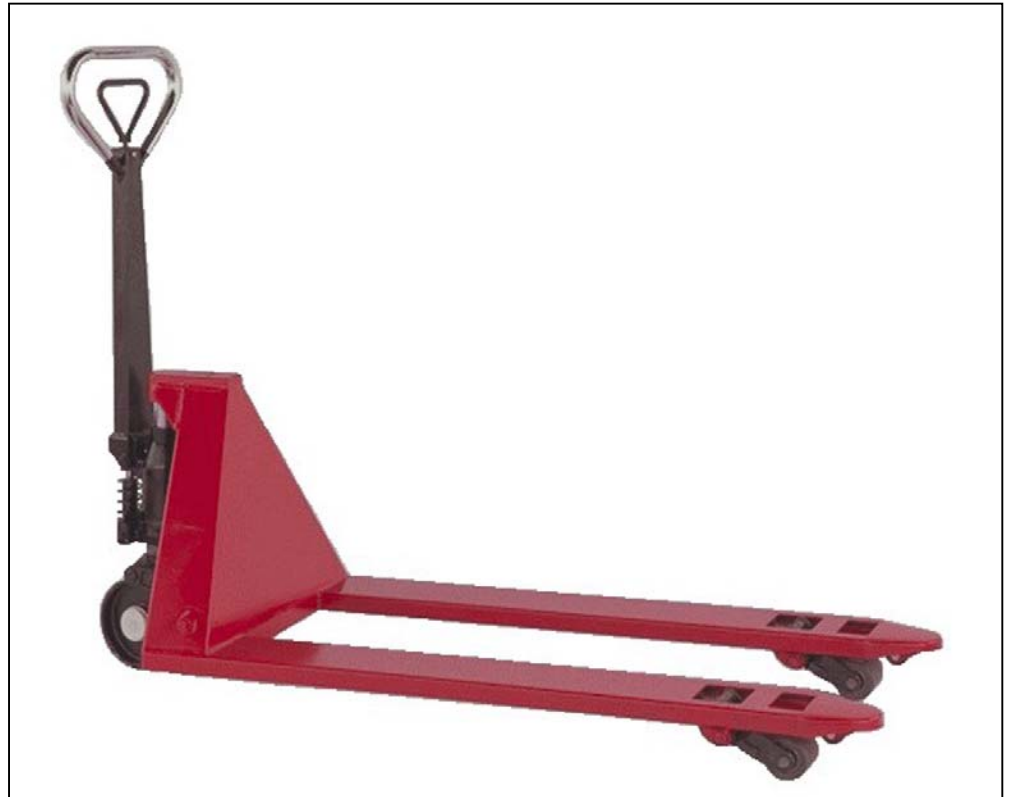

FEATURES:

Frame: The rugged heavy duty frame is constructed of one-piece formed double C-Channel steel with supporting plates welded at the top and bottom corners of the bulkhead for additional support.

Forks: The reinforced forks have additional rods that run along the Fork inside the "gussets" to handle the extra weight and tapered ends for easy pallet entry.

Hydraulic Pump: Leak proof with overload capacity, the maintenance free pump features a hard chrome plated Lift Cylinder & Piston, quality polyurethane Seals & Wipers, and an easy to remove Cartridge design.

Pump Stroke: Features a full 90 degree top to bottom stroke - requires 13 strokes to raise the forks to the maximum lift.

Handle: Tapered for greater strength, the spring-a-matic handle returns to the upright position automatically.

Bell Crank: There is a special support plate welded between the Bell Crank cylinder and arms on the ML70 to compensate for the extra weight.

Helper Rollers: Features 8 helper rollers for easy exit and entry of pallets.

Control Handle: The universal control handle has three position (raise/neutral/lower) fingertip control. Ergonomically designed for right or left handed operators and free of pinch points.

Steering: Featuring 200 degree pivot action for greater maneuverability with 7" steel Wheels (nylon also available), sealed bearings and "Ball-Thrust" steering.

Load Rollers: Features 2.9" steel rollers (nylon also available) with sealed bearings.

Push Rods: The eccentric adjustable push rods allow for individual adjustment capability of either fork height, and feature reinforcing rods welded on each side of each push rod to accommodate the heavier load capacity.

Hangers: The one piece hangers are constructed of Ductile Iron Cast for greater strength and longevity.

Pivot Points: Mobile utilizes self lubricating high impact bushings at all pivot points reducing maintenance requirements.

Options: Custom Widths & Lengths
Skid Adaptors
Tandem Wheels
Brake Attachments
Backstops
Nylon Wheels/Rollers

SPECIFICATIONS:

| | |
|----------------------|-----------------------|
| Load Capacity: | 7,000 lbs. |
| Fork Lengths: | 32" / 36" / 42" / 48" |
| Overall Fork Widths: | 20.5" / 27" |
| Lowered Fork Height: | 2.9" |
| Raised Fork Height: | 7.75" |
| Fork Width: | 6.5" |
| Weight: | 200 lbs. |
| Steer Wheels: | 7" |
| Load Rollers: | 2.9" X 3.6" |
| Std. Wheels/Rollers: | Steel |